
Option B — Surface mount

(deck or other solid surface)

1. Drill a hole in the surface for the cable to pass through, where the light will stand. Or the cable can be routed through the side using the channel in the bottom of the base.
2. Set the base over the hole. Fasten the base to the surface with deck or stainless steel #8 × 2-1/4" screws (Not Provided) through the flanged holes in the bottom of the base.
3. Reinstall the 3 small screws that attach the housing to the new base.
4. Reconnect the cable to the power supply.

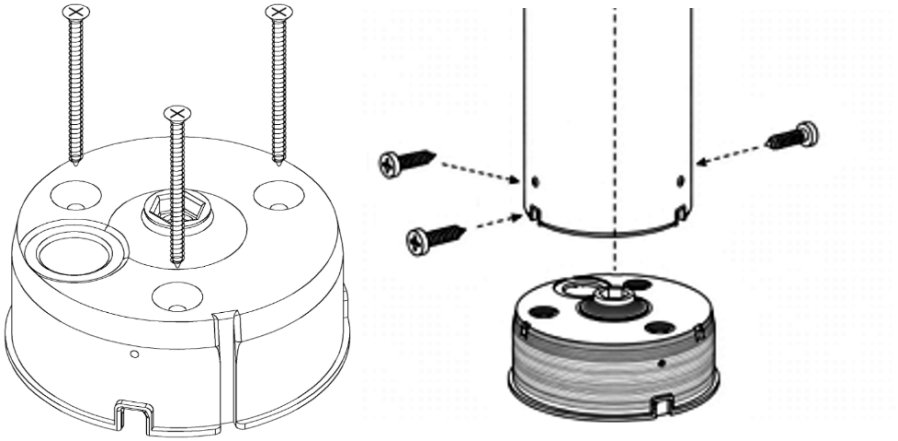

Surface mounting: screw to base, then install lamp housing. #8 × 2-1/4" screws (not provided).

Questions? Contact Very Very Bad Ideas LLC at
shop_vvbi@veryverybadidea.com.

Thank you for your purchase!


7 89049 97161 7

Philips Hue and Calla are trademarks of Signify. This replacement base is made by Very Very Bad Idea, LLC and is not affiliated with or endorsed by Signify.

Philips Hue Calla

Upgraded Base Replacement

Installation Instructions

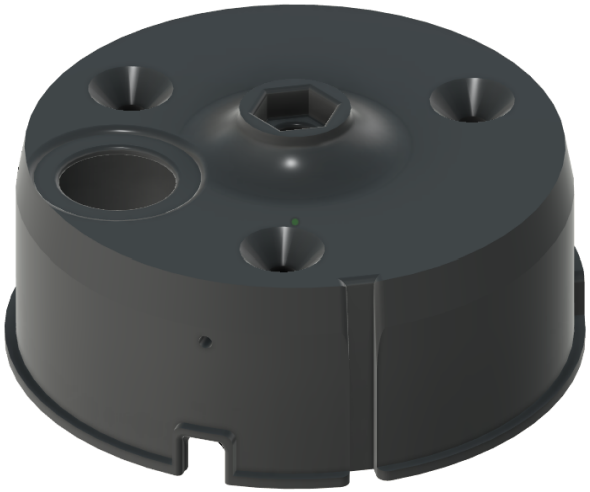

The VVBI replacement base with the included stainless stake bolt.

Base only — lamp not included

Very Very Bad Idea, LLC
(206) 800-8581 · www.veryverybadidea.com
shop_vvbi@veryverybadidea.com

What's in the box

- 1 × VVBI replacement base
- 1 × stainless steel bolt, M8 × 50 mm (included) — use it to remount the original ground stake

Not included: surface-mount screws for deck mounting (#8 × 2-1/4" stainless steel).

You will need: a Phillips screwdriver; for deck mounting, a drill, deck or stainless steel screws.

> **Tip:** Do the repair on a work surface or a tray, so the small screws don't get lost.

Before you start — save your serial number

Important: The serial number and model information for your light are printed on the original base. Before you remove the old base, write those numbers down and keep them with your records. Do not discard the original base — if you ever need to make a warranty claim, you can send the original base in with the light for the warranty repair.

Removing the old base

1. Disconnect or turn off the power, then unplug the cable at its connector and remove the light.
2. Remove the 3 small screws from the sides of the lamp. These screws hold the metal shell to the base. Set them aside — you will reuse them.
3. Lift the metal shell off the old base, feeding the cable out as you go.


Mounting the new base — choose one

Step 1 — Cable mounting (needed for both options)

1. Remove the old cable and its grommet from the old base.
2. Thread the old cable and grommet through the new base. Make sure it is properly seated — it seals the light against moisture and bugs.

Option A — Ground stake

1. Pass the included bolt through the center of the base.
2. Thread the original ground stake onto the bolt and tighten the bolt by turning the stake — the stake is what tightens it.
3. Reinstall the 3 small screws that attach the housing to the new base.
4. Drive the stake into the ground where the light will stand. Reconnect the cable to the power supply.

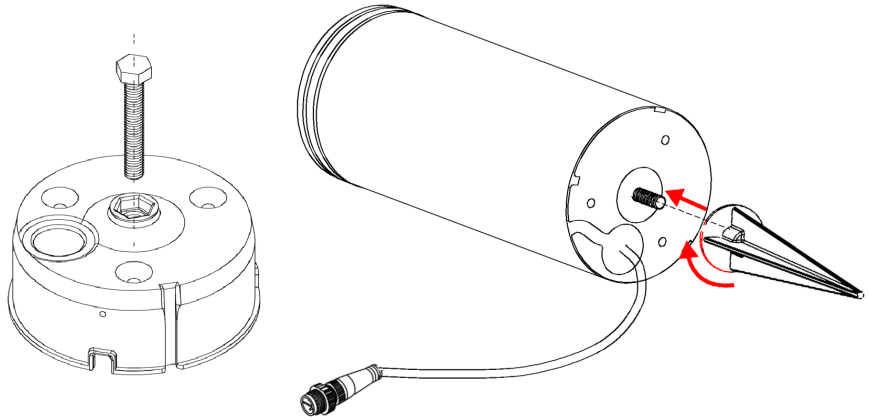

Stake mounting: turn the stake to tighten the bolt.